


## Diversity / Diversity Groove

Diversity: 10 Colourways | Diversity Groove: 5 Colourways









# Diversity / Diversity Groove

Diversity: 10 Colourways | Diversity Groove: 5 Colourways



Suitable for use


Heavy Contract Class 33 Dyed Nylon

Diversity Groove 5 Colourways

10 year Warranty

500 gsm Pile Yarn Weight

100% Envirobase

















Style	Tufted 1/10" Loop Pile Tile
Fibre	Construction 100% Solution Dyed Nylon
Pile Yarn Weight	500 gsm
Pile Height	3mm
Total Weight	4280 gsm
Total Thickness	5.5mm (Tile)
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Tile Size	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class LC1	
Anti-static	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939	Not less than 80% recovery after 24 hours
Colour fastness to BS1006	To Light (BS EN ISO105-B02) Better than 6
	To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
	To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char
	(Hot Metal Nut Test)
	Euroclass Flammability Bfl-s1
	(BS EN 13501)
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status Breeam® 'A+' Rated	
Diversity Groove is a random lay product	













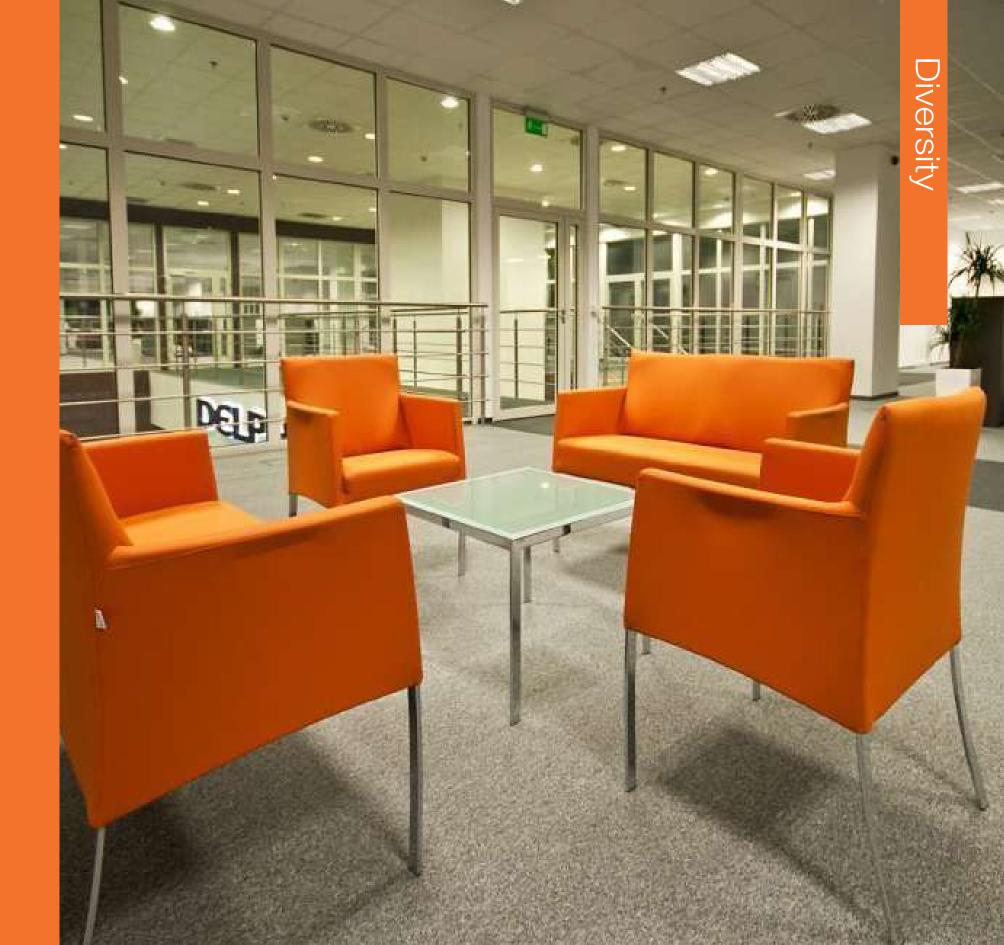




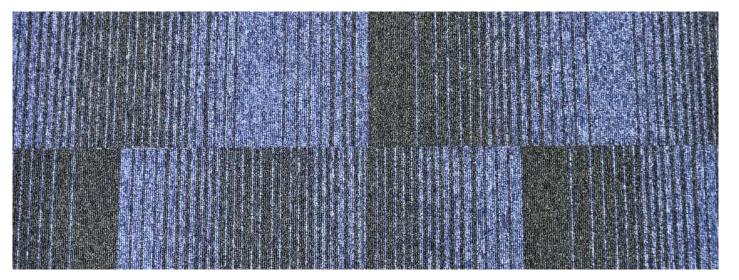


616812 Gusto (LRV - Y3.57)




810820 Vibe (LRV - Y8.04)

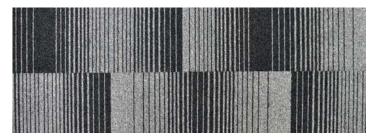

812820 Armada (LRV - Y5.31)

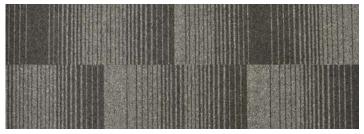


812810 Asha (LRV - Y4.39)

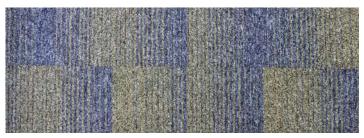

616810 Jaxx (LRV - Y5.74)



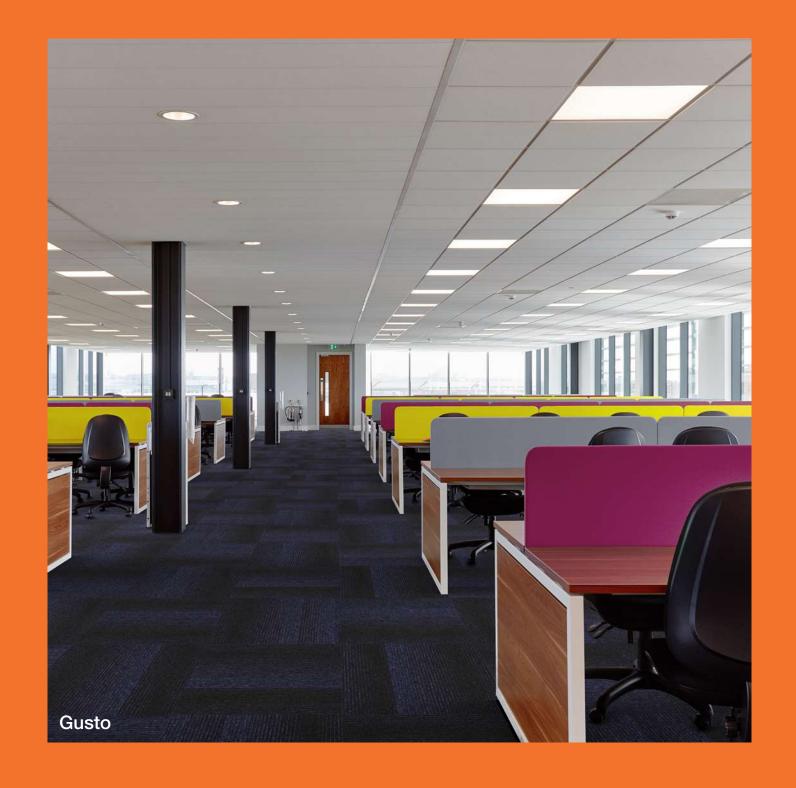



### INSTALLATION


Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.

### COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

#### MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.

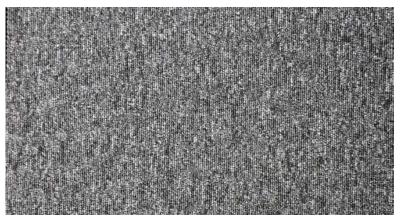

Lupus Grey 811 (LRV - Y27.56)



Purple Rain, 750 (LRV - Y4.26)





Panther, 812 (LRV - Y2.94)



(LRV - Y6.63)



Mouse, 830 (LRV - Y16.28)

Denim, 616

(LRV - Y4.95)

Grasshopper, 550

(LRV - Y14.41)



London Stone, 820 (LRV - Y10.04)



Liberty, 612 (LRV - Y3.13)



Electric, 625 (LRV - Y5.12)



Skylight, 640 (LRV - Y7.65)



Blazer, 210 (LRV - Y4.52)



Racing Green, 505 (LRV - Y4.89)
































Bark, 108 (LRV - Y9.82)



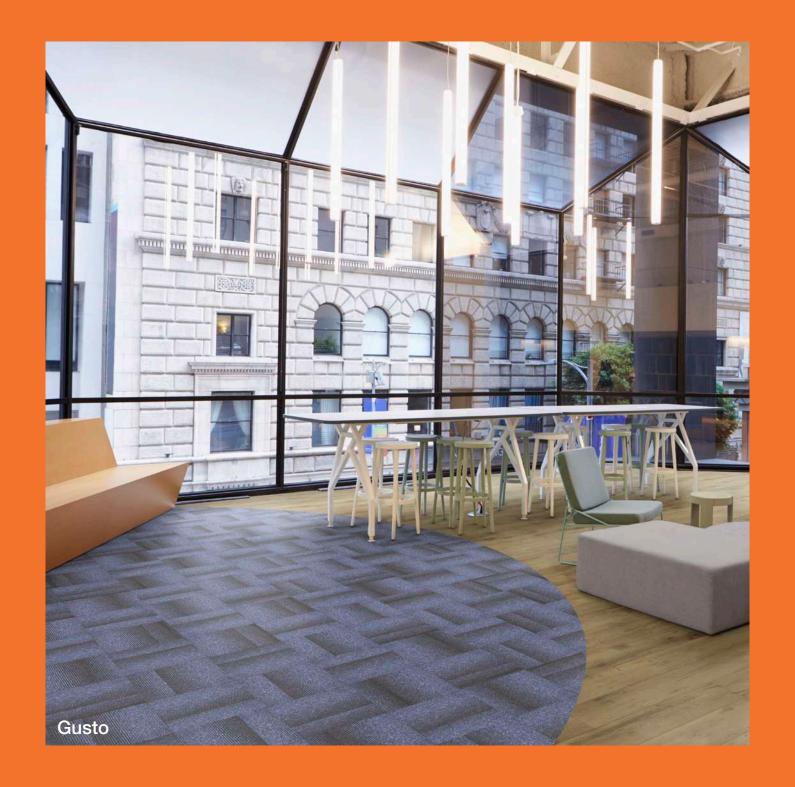













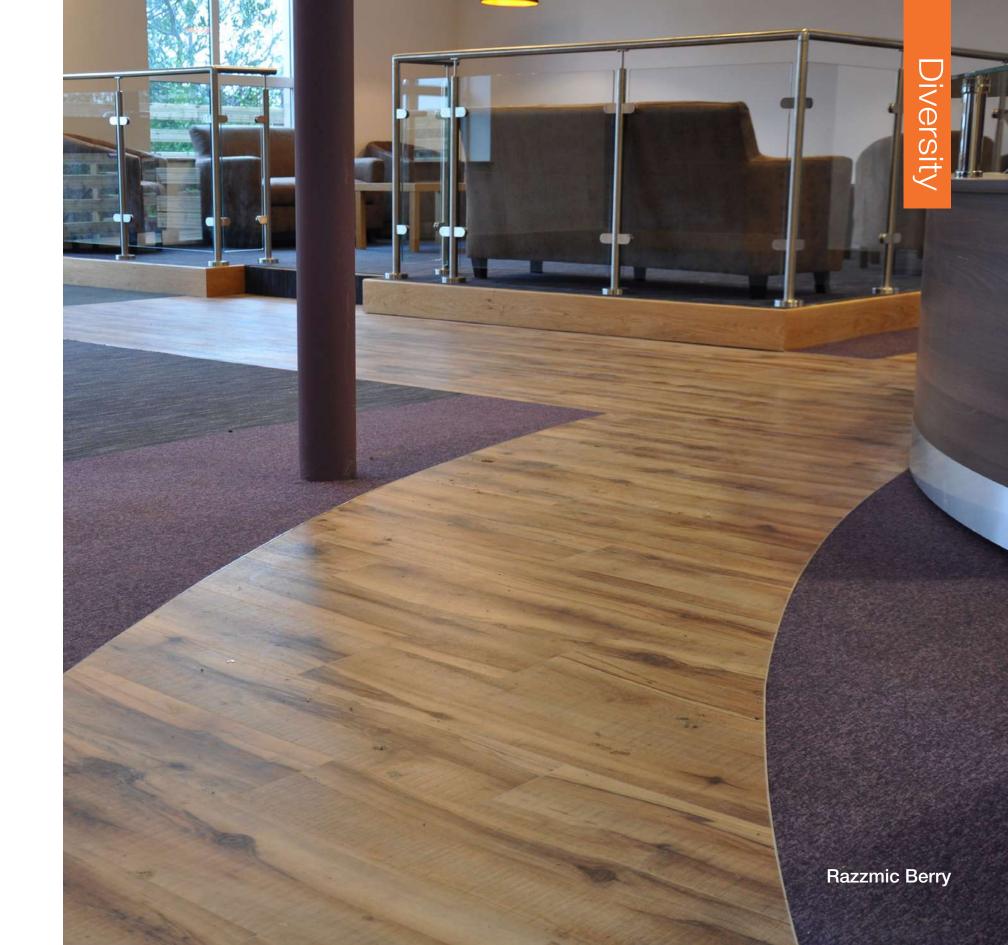





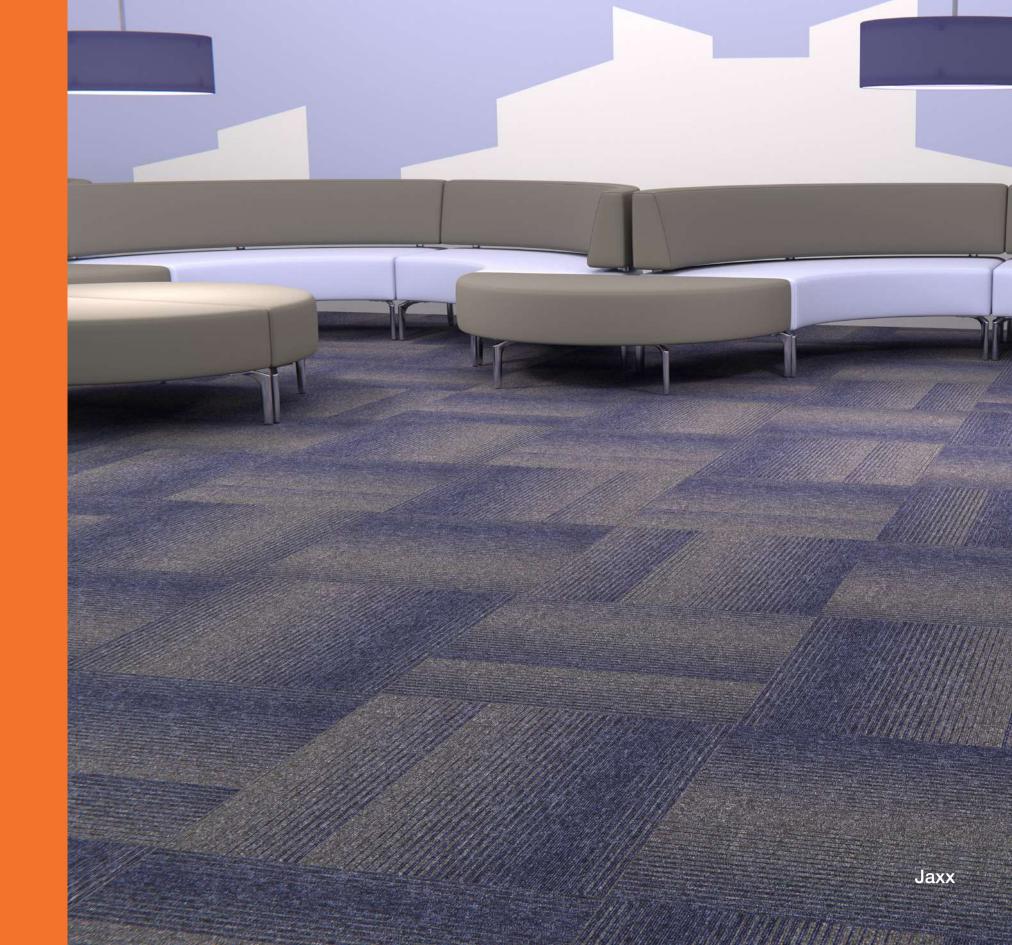














### Experience Carpet Tiles



### Diversity / Diversity Groove

Diversity: 10 Colourways | Diversity Groove: 5 Colourways

A Division of National Floorcoverings Ltd.

Farfield Park, Manvers, Wath-upon-Dearne, Rotherham, S63 5DB T. +44(0) 1709

763839Samples Department: +44(0) 1709 763805.

Order Free Samples Online E. samples@paragon-carpets.co.uk

www.paragon-carpets.co.uk | www.mat-works.co.uk






Download our free apps NOW

Search Paragon Carpets















BREEAM® 'A+' Rated



