



Protect

Specification according to EN 1307

Type of manufacture	ISO 2424		Tufted 1/8 “						
Aspect	ISO 2424		Cut pile						
Dye method			Hank dyed						
Dimension	EN ISO 24342	cm x cm	50 x 50 / 19,68” x 19,68” (16 tiles per box)						
Primary backing	ISO 2424		Polyester fleece						
Secondary backing	ISO 2424		DESSO ProBase Polyver®						
Pile fibre composition	ISO 2424		80% wool - 20% polyamide						
Total thickness	ISO 1765	mm	10.0	inch	0.4				
Effective pile thickness	ISO 1766	mm	5.2	inch	0.20				
Total mass	ISO 8543	g/m²	4800	oz/yd²	141.7				
Total pile mass	ISO 2424	g/m²	1470	oz/yd²	43.4				
Effective pile mass	ISO 8543	g/m²	790	oz/yd²	23.3				
Pile density	ISO 8543	g/cm³	0.152	lb/in³	0.0055				
Number of tufts	ISO 1763	/dm²	1110	/yd²	92807				
Stroll test	ISO 6356	kV	-						
Vertical resistance	ISO 10965	Ohm	-						
Horizontal resistance	ISO 10965	Ohm	-						
Use classification	EN 1307		-						
Luxury rating	EN 1307		-						
Dimensional stability	EN 986	%	-						
Impact sound reduction ΔL _w	ISO 10140	dB	-						
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000	
		α _s	-	-	-	-	-	-	
Noise reduction	ISO 354	α _w	-						
Thermal resistance	ISO 8302	m².K/W	-						
Flammability	EN 13501-1		Cfl - s1 (loose laid tested)						
Prodis - GUT	www.pro-dis.info		-						

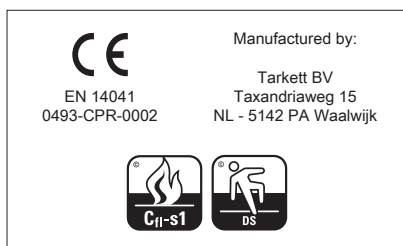

Tarkett's flooring products are to be installed in full accordance with DESSO installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Tarkett's flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit www.tarkett.com

EN-20200401